


DYMONIC® 100


Non-sag, single component, flexible polyurethane sealant for dynamic joints and damp substrate...

Dymonic® 100 exhibits tenacious adhesion with typical applications including expansion, control and precast concrete panel joints, as well as perimeter caulking and vinyl siding. The system can be fluid applied as a flashing material.

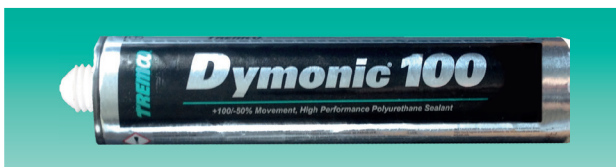


Almond	Aluminum Stone	Anodized Aluminum	Beige
Black	Bronze	Buff	Dark Bronze
Gray	Gray Stone	Hartford Green	Ivory
Limestone	Light Bronz	Natural Clay	Off White
Precast White	Redwood Tan	Sandalwood	Stone
White			

Features & Benefits




Joint Movement Capability

Suitable for a variety of joint widths with +100/-50% movement capability.

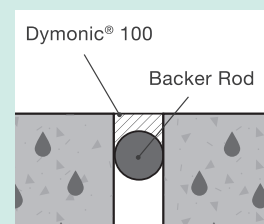


Substrate Requirements

Works on moist, damp and/or wet substrate including new concrete. Will not bubble.




Conditions of Use

Suitable for immersion conditions.

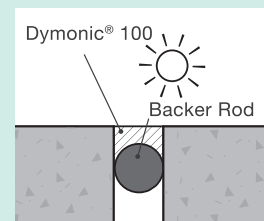


UV Resistance

Will not crack, craze or yellow under extreme UV exposure.



Jet-fuel Resistance

Resistant to jet-fuel.

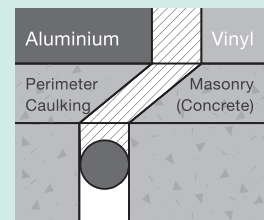

Flexibility of Use

Suitable for multiple applications.